




**RELIABLE
POWER**



Series:

- ▶ **Lithium-Ion 12V**
LFeLi series
- ▶ **Flooded Flat Plated**
DT Series
- ▶ **Deep Cycle AGM**
LDC series

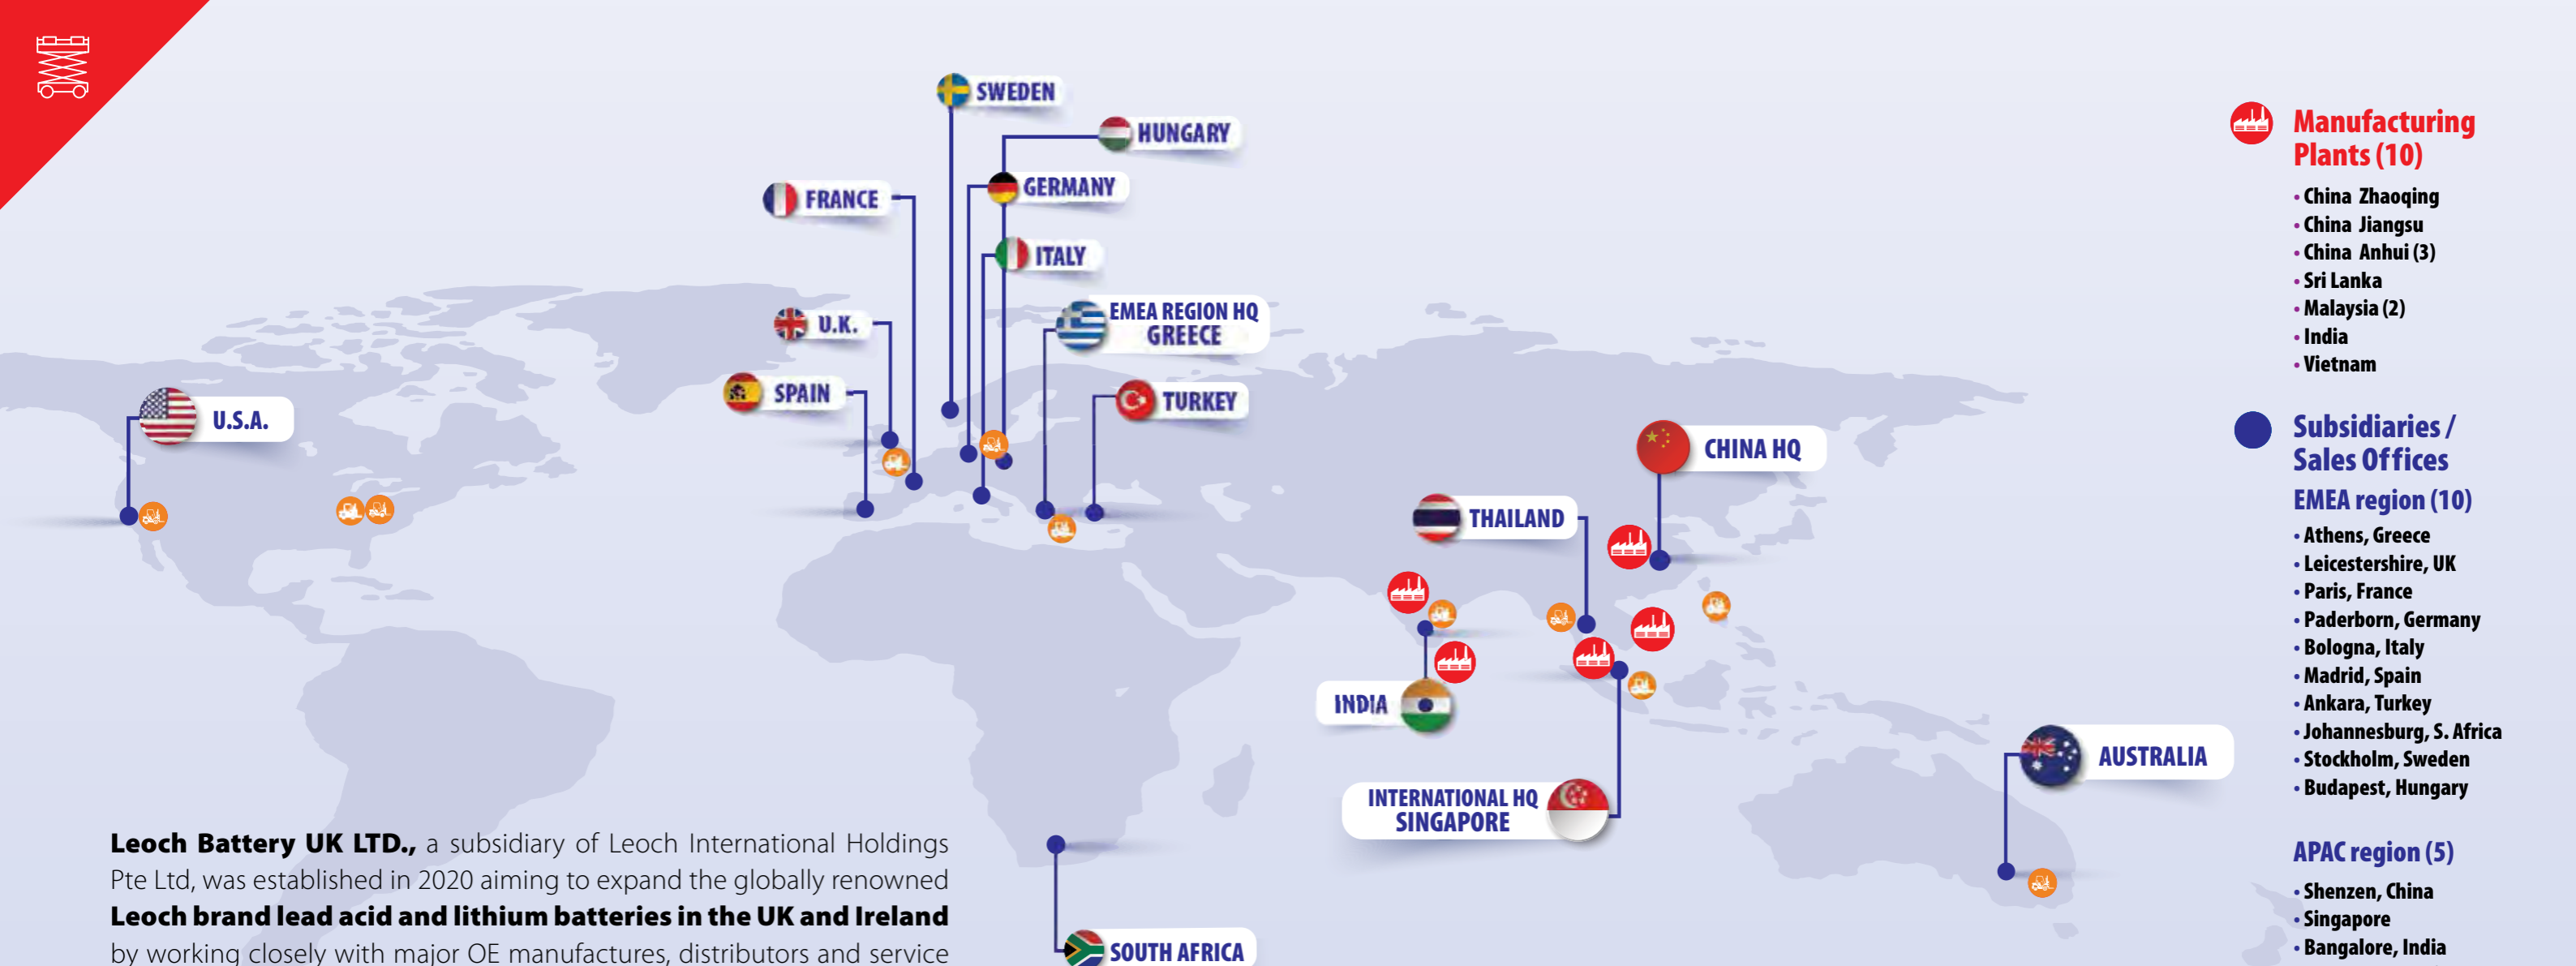

- Manufacturing Plants (10)**
- China Zhaoqing
 - China Jiangsu
 - China Anhui (3)
 - Sri Lanka
 - Malaysia (2)
 - India
 - Vietnam

- Subsidiaries / Sales Offices**
- EMEA region (10)**
- Athens, Greece
 - Leicestershire, UK
 - Paris, France
 - Paderborn, Germany
 - Bologna, Italy
 - Madrid, Spain
 - Ankara, Turkey
 - Johannesburg, S. Africa
 - Stockholm, Sweden
 - Budapest, Hungary

- APAC region (5)**
- Shenzhen, China
 - Singapore
 - Bangalore, India
 - Sydney, Australia
 - Bangkok, Thailand

Los Angeles, USA

● Subsidiaries / Sales Offices
 ● Manufacturing Plants
 ● Warehouses

Leoch Battery UK LTD., a subsidiary of Leoch International Holdings Pte Ltd, was established in 2020 aiming to expand the globally renowned **Leoch brand lead acid and lithium batteries in the UK and Ireland** by working closely with major OE manufactures, distributors and service providers as well as B2B customers who use our batteries.

Leoch retains ten (10) regional manufacturing plants located in **PRC, Malaysia, Sri Lanka, India and Vietnam**, producing mainly reserve power batteries, SLI batteries and motive power batteries with an annual production capacity of over 24GWH / year.

Your Global Battery Partner

| | | | | | | |
|--------------------|----------------------|----------------------------------|--|---------------------|------------------|----------------------------|
| | | | | | | |
| 1.75b | 10 | 24 | 16 | 14.000 | 105 | 3.000 |
| US \$ Annual Sales | Manufacturing Plants | GWH Production Capacity per Year | Subsidiaries and Sales Offices Worldwide | Employees Worldwide | Production Lines | Customers around the World |

...covering your needs for reliable power

Leoch provides batteries that feature long service life, fit & forget design and deep cycling capabilities. So whether you're looking to power a scissor lift, cherry picker or a boom, from major construction projects to maintaining industrial facilities, we will have a solution to suit your needs.



Lithium-Ion 12V LFeLi series



-20°C ~ +60°C
TEMPERATURE RANGE

Up to 12 months at 25°C
SELF-DISCHARGE

3 Years*
WARRANTY

3200-4000 cycles*
NUMBER OF CYCLES AT 60% DOD

* depending on the application and the actual model

Lithium-Ion batteries offer extreme cyclic abilities compared to lead-acid batteries. For cyclic demanding applications Leoch has developed Lithium-Ion (LiFePo4) batteries to replace 12V top terminal lead acid batteries offering 5000 cycles at 50% DoD, top terminal design and a wide range of capacities for easy "drop-in" replacement.

GENERAL FEATURES

ECO FRIENDLY
Environmentally friendly without any heavy metals inside

LONG LIFE
Low self-discharge ($\leq 2\%$ per month) for increased shelf life (up to 1 year at 25°C)

DEPTH OF DISCHARGE
Extreme cycle life, up to 5000 cycles at 50% DoD to reduce CAPEX & OPEX in cyclic applications

LITHIUM TECHNOLOGY
Lithium-Ion Phosphate chemistry has a high thermal runaway threshold being the safest market lithium technology





LIGHT WEIGHT
Light weighted, with high energy density

FAST CHARGING
Fast charge capability of up to 1C10 offers unparalleled charging performance

BATTERY SPECIFICATIONS

| Model | Nominal Voltage (V) | Rated Capacity 10Hr @ 2.70V/cell (AH) | Approx. Dimensions | | | | | | | | Approx. Weight | |
|---------------|---------------------|---------------------------------------|--------------------|-------|--------|------|--------|------|--------------|------|----------------|-------|
| | | | Length | | Width | | Height | | Total Height | | kg | lbs |
| | | | mm | in. | mm | in. | mm | in. | mm | in. | | |
| LFeLi-1220S | 12.8 | 20 | 181.50 | 7.15 | 77.00 | 3.03 | 167.50 | 6.59 | 167.50 | 6.59 | 2.60 | 5.70 |
| LFeLi-1233S | 12.8V | 33 | 195.00 | 7.67 | 130.00 | 5.12 | 167.00 | 6.57 | 167.00 | 6.57 | 4.20 | 9.30 |
| LFeLi-12100S | 12.8V | 100 | 330.00 | 12.99 | 173.00 | 6.81 | 212.00 | 8.35 | 220.00 | 8.66 | 13.10 | 28.90 |
| LFeLi-2440M | 25.6V | 40 | 330.00 | 13.00 | 173.00 | 6.81 | 214.00 | 8.42 | 214.00 | 8.42 | 12.60 | 27.78 |
| LFeLi-2440MMS | 25.6V | 40 | 245.00 | 9.65 | 168.00 | 6.61 | 205.00 | 8.07 | 205.00 | 8.07 | 10.00 | 22.05 |
| LFeLi-2450M | 25.6V | 50 | 330.00 | 13.00 | 170.00 | 6.69 | 214.00 | 8.42 | 214.00 | 8.42 | 15.00 | 33.07 |
| LFeLi-2460M | 25.6V | 60 | 483.00 | 19.02 | 170.00 | 7.05 | 238.50 | 9.39 | 238.50 | 9.39 | 17.80 | 39.24 |

PERFORMANCE CHARACTERISTICS

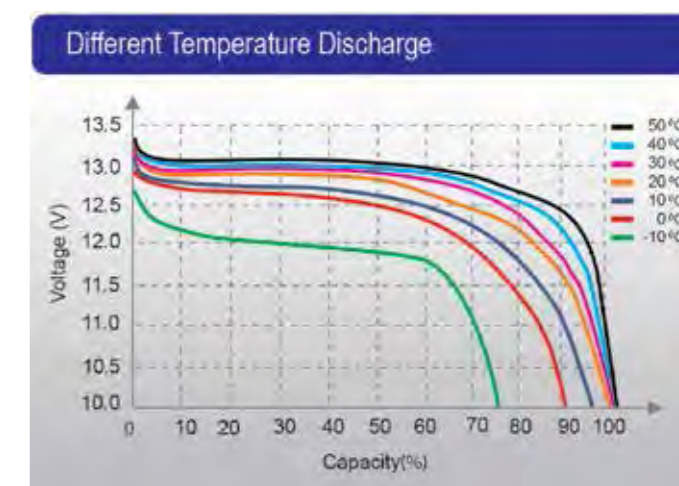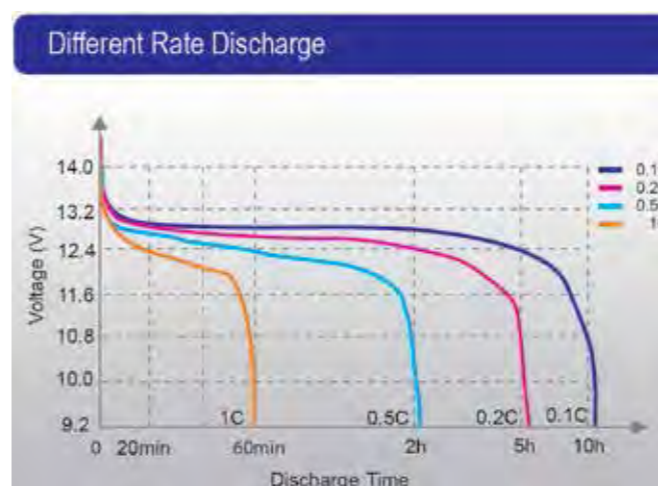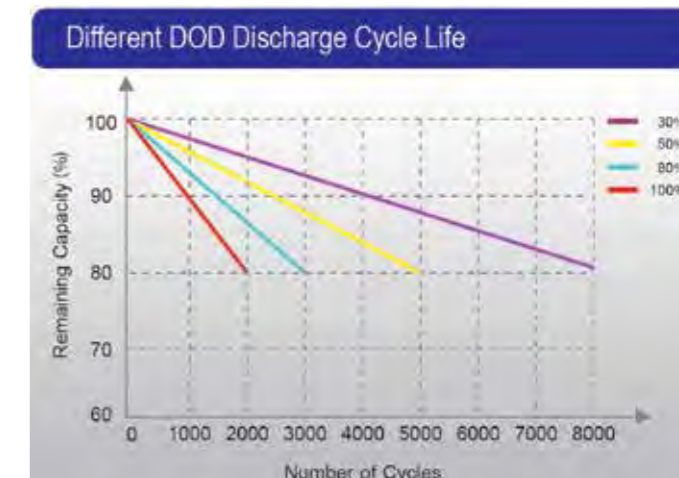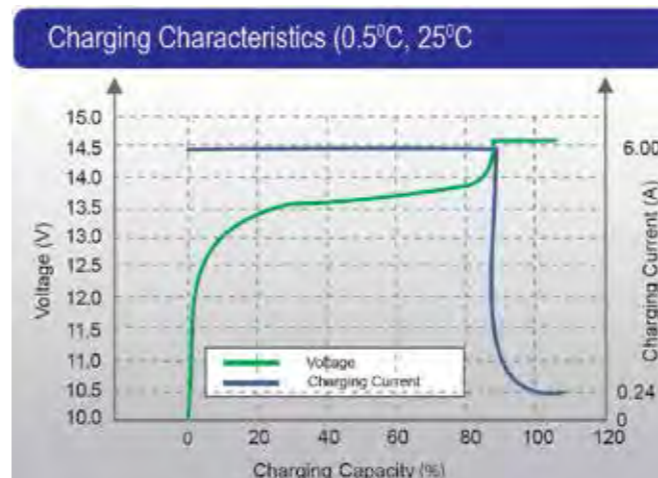



Flooded Flat Plated DT series



- +5°C – +50°C**
TEMPERATURE RANGE
- Up to 6 months at 25°C**
SELF-DISCHARGE
- 1 year**
WARRANTY
- Up to 700 cycles**
NUMBER OF CYCLES AT 80% DOD (DOWN TO 60% RCAP)

Leoch Flooded Deep Cycle batteries, DT series is a collection of flooded serviceable heavy-duty, ranging from 6 & 8 volt. Optimized for motive and industrial deep cycle applications with power capabilities that range from 170Ah to 260Ah. Engineered using enhanced SiO₂-PVC Nano Grade separators and advanced TTP welding techniques, technology, and flat plate design, they cover any requirement of motive and in general deep cycle applications and offer up to 700 cycles at 80% DoD.





GENERAL FEATURES

- PSoC ENDURANCE**
Designed and optimized for cyclic intensive and PSoC motive applications
- SAFETY**
High vibration resistance PP casing
- SEPARATOR**
Enhanced SiO₂-PVC Nano Grade separators and advanced TTP welding technology for maximum performance and durability
- LONG SERVICE LIFE**
Special pasting formula ensures long service life
- NO LEAKAGE**
Proprietary design refilling plugs with special construction, minimizing water loss
- AIR PERMEABILITY**
Refilling plugs with special construction for reduced water loss over usage time

BATTERY SPECIFICATIONS

| Model | Nominal Voltage (V) | Rated Capacity (AH) | | | Reserve Capacity (min) | | | Approx. Dimensions | | | | | | Approx. Weight | | Terminal Type | | |
|-------|---------------------|---------------------|------|------|------------------------|----------|----------|--------------------|-------|--------|------|--------|------|----------------|-------|---------------|-------|-----------|
| | | 20 HR | 5 HR | 3 HR | @25 Amps | @56 Amps | @75 Amps | Length | | Width | | Height | | Total Height | | | | |
| | | | | | | | | mm | in. | mm | in. | mm | in. | mm | in. | | kg | lbs |
| DT606 | 6 | 210 | 175 | 140 | 380 | - | 105 | 260.00 | 10.24 | 180.00 | 7.09 | 248.00 | 9.76 | 279.50 | 11.00 | 24.20 | 53.40 | DT-M8 (A) |
| DT106 | 6 | 225 | 185 | 155 | 445 | - | 115 | 260.00 | 10.24 | 180.00 | 7.09 | 248.00 | 9.76 | 279.50 | 11.00 | 27.50 | 60.60 | DT-M8 (A) |
| DT126 | 6 | 240 | 195 | 160 | 485 | - | 130 | 260.00 | 10.24 | 180.00 | 7.09 | 248.00 | 9.76 | 279.50 | 11.00 | 27.60 | 60.80 | DT-M8 (A) |
| DT146 | 6 | 260 | 215 | 170 | 530 | - | 145 | 260.00 | 10.24 | 180.00 | 7.09 | 248.00 | 9.76 | 279.50 | 11.00 | 28.20 | 62.20 | DT-M8 (A) |

PERFORMANCE CHARACTERISTICS

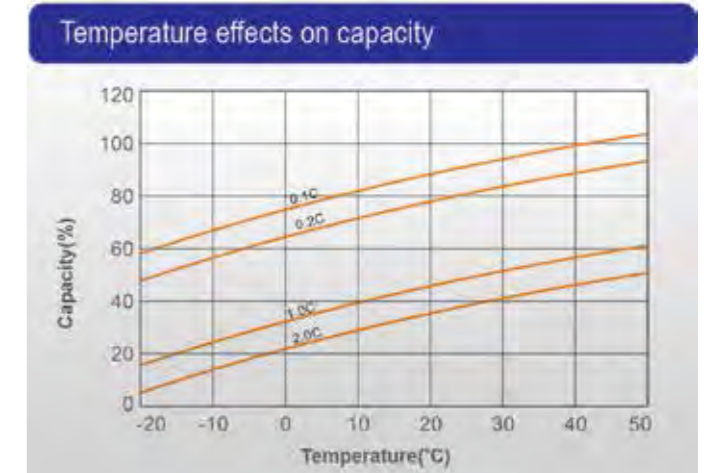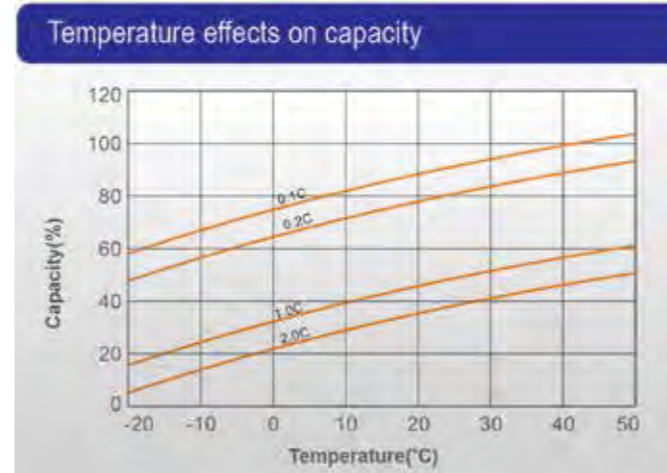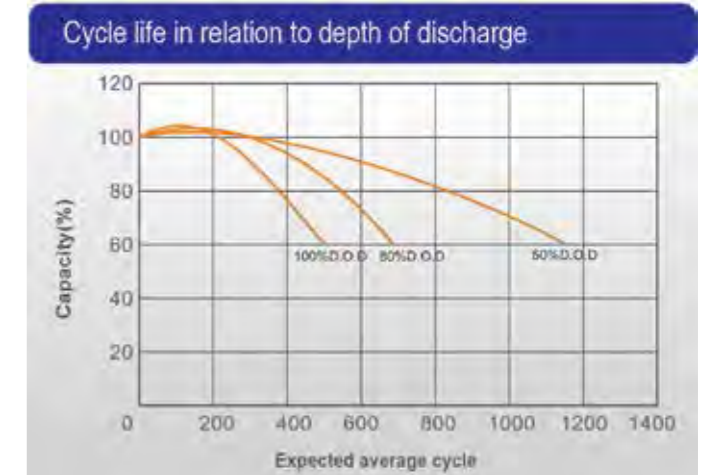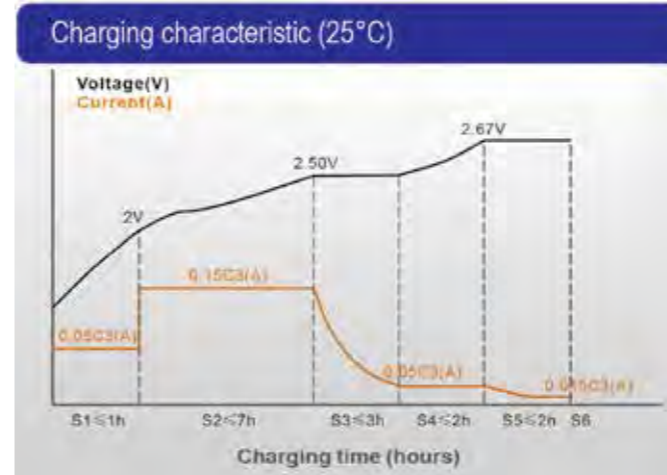



Deep Cycle AGM LDC series



-15°C – +50°C

TEMPERATURE RANGE

Up to 6 months at 25°C

SELF-DISCHARGE

1~2 Years*

WARRANTY

1000 cycles

NUMBER OF CYCLES AT 80% DOD

*model dependent

The best AGM battery on the market! The Leoch LDC range of 6, 8 and 12 volt batteries offers superior performance with AGM technology, providing a long-life and super-fast power solution for a multitude of applications in industrial and lifestyle markets. The LDC range is uniquely designed for deep cycle performance with a positive plate formula to minimise water consumption and provide a long service life at 1,000 cycles at 60% DoD (Depth of Discharge).

GENERAL FEATURES



LONG SERVICE LIFE

Thick plates using a special pasting formula and low SG ensures long service & cyclic life



SAFETY

Unique anti-explosion one-way vent valve design to minimize water loss & increase safety



SEPARATOR

Double separator configuration: Long cycle life & High energy density



PSoC
ENDURANCE

Designed and optimized for cyclic intensive and PSoC motive applications



DEEP CYCLE

Special mixture of carbon and additional proprietary additives in the negative active material to deliver superior cycling performance



REINFORCED CASE


Reinforced case jars for superior vibration resistance & tolerance

BATTERY SPECIFICATIONS


| Model | Nominal Voltage (V) | Rated Capacity (AH) | | | | Approx. Dimensions | | | | | | Approx. Weight | | Terminal Type | | |
|------------------|---------------------|---------------------|------|-----|-----|--------------------|--------|--------|-------|--------|--------|----------------|--------|---------------|--------|-----------|
| | | 20HR | 10HR | 5HR | 3HR | Length | | Width | | Height | | Total Height | | | | |
| | | | | | | mm | in. | mm | in. | mm | in. | mm | in. | | kg | lbs |
| LDC12-90-G24-DT | 12 | 90 | 85 | 77 | 72 | 260.00 | 102.36 | 168.00 | 66.14 | 208.00 | 81.89 | 232.50 | 91.54 | 23.80 | 52.47 | MT(5/16") |
| LDC12-105-G27-DT | 12 | 108 | 104 | 96 | 90 | 306.00 | 120.47 | 168.00 | 66.14 | 208.00 | 81.89 | 232.50 | 91.54 | 27.80 | 61.29 | MT(5/16") |
| LDC12-115-G31-DT | 12 | 118 | 113 | 107 | 98 | 330.00 | 129.92 | 173.00 | 68.11 | 212.00 | 83.46 | 237.00 | 93.31 | 31.70 | 69.89 | MT(5/16") |
| LDC12-150-GC12 | 12 | 150 | 143 | 136 | 125 | 327.00 | 128.74 | 180.00 | 70.87 | 274.00 | 107.87 | 274.00 | 107.87 | 42.20 | 93.03 | T11 |
| LDC6-210-GC2 | 6 | 210 | 200 | 175 | 165 | 260.00 | 102.36 | 180.00 | 70.87 | 252.00 | 99.21 | 274.00 | 107.87 | 27.20 | 59.97 | MT(5/16") |
| LDC6-224-GC2 | 6 | 224 | 210 | 192 | 173 | 260.00 | 102.36 | 180.00 | 70.87 | 247.00 | 97.24 | 253.00 | 99.61 | 30.50 | 67.24 | T11 |
| LDC6-265-GC2 | 6 | 268 | 240 | 220 | 200 | 260.00 | 102.36 | 180.00 | 70.87 | 263.00 | 103.54 | 268.00 | 105.51 | 32.90 | 72.53 | T11 |
| LDC6-245 | 6 | 245 | 232 | 210 | 196 | 243.00 | 95.67 | 187.50 | 73.82 | 275.00 | 108.27 | 275.00 | 108.27 | 32.40 | 71.43 | T11 |
| LDC6-350 | 6 | 350 | 332 | 305 | 285 | 295.00 | 116.14 | 180.00 | 70.87 | 346.00 | 136.22 | 368.00 | 144.88 | 48.20 | 106.26 | MT(3/8") |
| LDC6-400-L16 | 6 | 400 | 375 | 342 | 310 | 295.00 | 116.14 | 180.00 | 70.87 | 406.00 | 159.84 | 428.00 | 168.50 | 54.20 | 119.49 | MT(5/16") |

PERFORMANCE CHARACTERISTICS


Self Discharge Characteristics

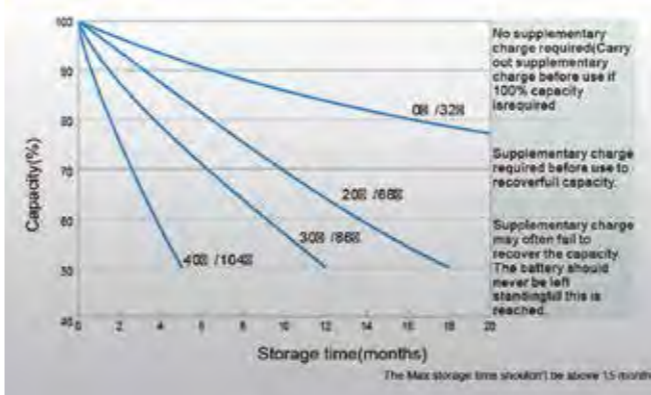


Relationship of OCV & State of Charge (25°C, 77°F)

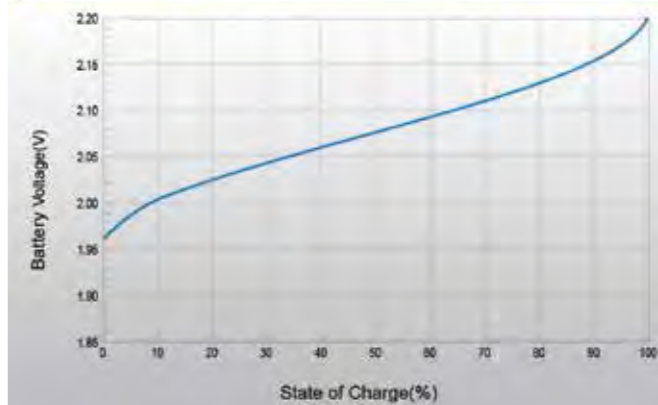

Cycle Life in relation to Depth of Discharge

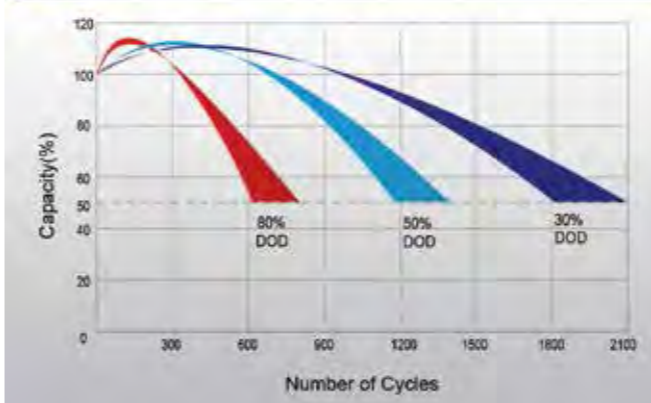

Charging Profile

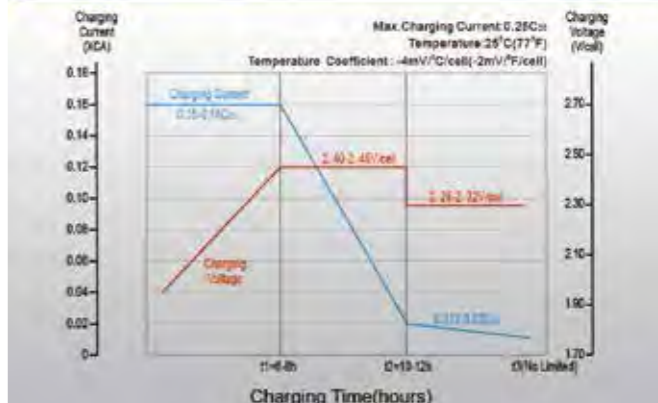




Why choose us?



Leoch Battery UK is a proud subsidiary of one of the world largest battery manufacture, offering you the best of both UK and global resources.

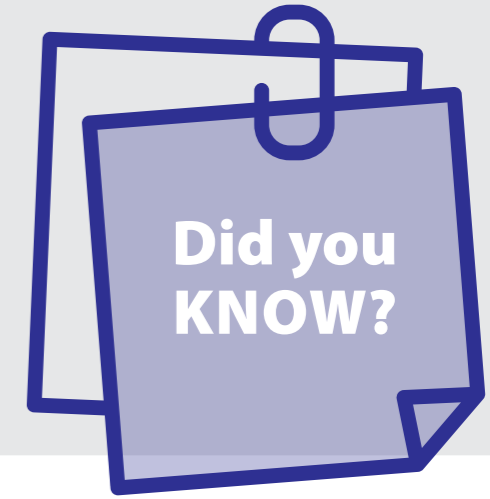

Central UK warehouse

Our centrally located headquarters and warehouse in Market Harborough, Leicestershire, in the heart of the East Midlands, allow us to distribute our extensive range of batteries with ease and speed across the entirety of the country.



Quality assured products

Partnering directly with Leoch, one of the largest battery producers in the world, means we know where our products have been manufactured. Continuity of supply is assured: a rarity in the industry.



UN 38.3 Accreditation

Leoch Lithium 12 and 24V Lithium batteries boast Section 38.3 accreditation from the UN Manual of Tests and Criteria (UN Transportation Testing). This means they are safe to be transported by air, sea, rail and road and throughout the battery's transportation process right through to the end user. The protocol includes identifying/classifying lithium batteries; testing/ qualification requirements; design guidance/conditions and packaging/shipping obligations



Own branding

Trade customers of Leoch Battery UK can take advantage of the technologies of one of the largest battery manufacturers in the world and develop their own private labelling. An increasingly popular practice, own-branding can lower your costs and increase your profit margins. Both paper and screenprint labelling are possible and we welcome all enquiries.



CE Marking

Leoch Battery's 12 and 24V Lithium batteries are CE accredited, signifying that they conform with health, safety and environmental protection standards for products sold within the European Economic area. The batteries are assembled according to tests including IEC-61000-6-1 and 61000-6-3 which relate to the Electromagnetic Compatibility (EMC) Directive 2014/30/EU.



National sales team

We have a dedicated sales team of highly experienced battery professionals out on the road, who are backed up by operations and sales experts in-house. Whether on the end of a phone or making a visit to you in person, our representatives are always on hand to provide expert advice on any technical, sales or after-sales service matters.



National warranty coverage

For your convenience, Leoch Battery UK's warranty coverage (Link to warranty page) extends to all batteries distributed by the company, whether purchased directly from us or bought through one of our customers. Our batteries are supported by excellent manufacturer warranties of 12 months and tested by trained experts at our UK facility.

Our Website



www.leochbattery.co.uk

is the site to bookmark for up-to-date Company information and the latest product news. Blogs, downloads and product advice can all be found here, as well as details of the latest exhibitions we're attending.

Please note that all products and specifications are subject to change © Leoch Battery 2020.



Our team of dedicated Account Managers and office staff would be delighted to advise on further product information, technical data and suitability, regardless of the application.



Contact us via phone on **01858 433 330**
or email on **sales.uk@leoch.com**



LEOCH EUROPE S.A.
EMEA Region Headquarters

5, Filikon Str., 121 31 Athens, GREECE
Tel.: (+30) 210 5760318
E-mail: info_EMEA@leoch.com

LEOCH BATTERY UK LTD.

Unit B5, Welland Business Park,
Market Harborough
Leicestershire, LE16 7PS,
UNITED KINGDOM
Tel.: (+44) 1858 433330
E-mail: sales.uk@leoch.com

LEOCH FRANCE SAS

3, Rue du Clos Reine,
78410 Aubergenville, FRANCE
Tel.: (+33) 1 30 90 24 82
E-mail: info_Leoch.France@leoch.com

LEOCH NORDEUROPA GmbH

Lindberghring 12,
33142 Büren, GERMANY
Tel.: (+49) 2955 7482888
E-mail: info_Leoch.Nordeuropa@leoch.com

LEOCH ITALIA srl.

Via Fornace 2,
40023 Castel Guelfo (BO), ITALY
Tel.: (+39) 0542 013440
E-mail: info_Leoch.Italia@leoch.com

LEOCH IBERIA S.L.

Camino de Pinares Llanos, 9
28670 Villaviciosa de Odón
Madrid, SPAIN
Tel.: (+34) 91 616 16 86
E-mail: info_Leoch.Iberia@leoch.com

www.leoch.eu

www.leochbattery.co.uk

FOLLOW US:

