

AGM START-STOP BATTERY

B24AGM-158 (12V45Ah)



CHARACTERISTICS



| Item | Specifications |
|--------------------------------|--------------------|
| Nominal Voltage | 12V |
| Nominal Capacity (20HR) | 45Ah |
| Reserve Capacity | 68min |
| Cold Cranking Amps@0°F (-18°C) | 380A |
| Dimension | Length |
| | 236mm (9.29inches) |
| | Width |
| Height | 128mm (5.04inches) |
| | 222mm (8.74inches) |
| Approx Weight | 13.6kg (30.0lbs) |
| Terminal | 3 |
| Cell layout | 0 |
| Hold-Down | B0 |
| Case | Black-PP Material |
| Cover | Black-PP Material |
| Handle | TS1 |

APPLICATIONS

- Car with start-stop system
- EV/HEV
- Engine start

GENERAL FEATURES

- Maximum CCA and life
- Valve regulated technology
- Advanced Absorbed Glass Mat (AGM) technology
- Top-level safety - absolutely no free acid
- 2x Faster Charge Acceptance than conventional starter batteries
- 3x higher cycle life than conventional starter batteries
- Suit for working in partial state of charge operations (PSoC)
- OE quality certification

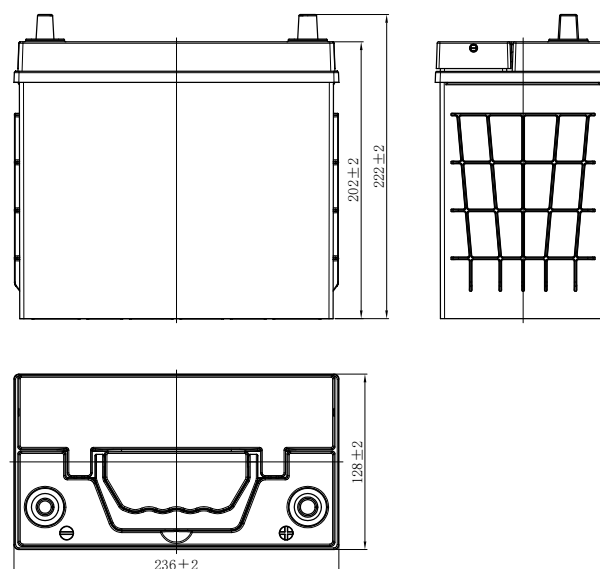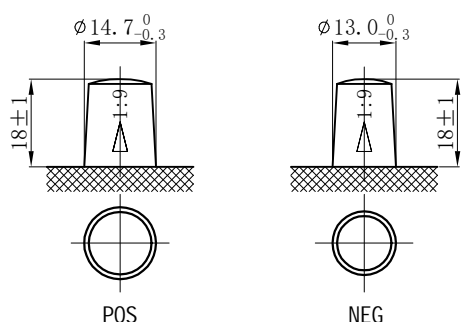

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu